


12 Pocket

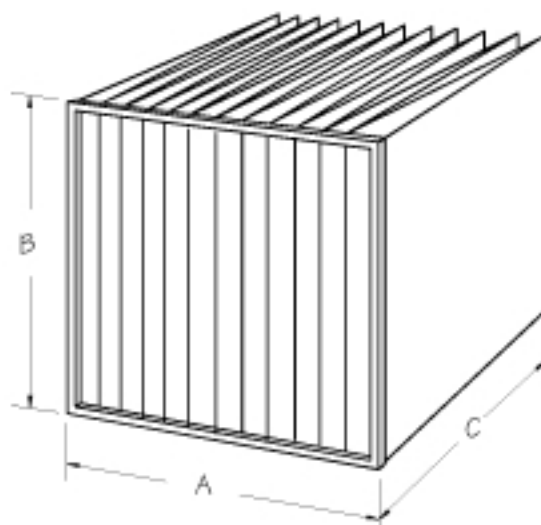

**Reliable Air Flow
Bag, 65%**

Characteristics

Media: 100% Synthetic Polypropylene Microfiber

Pockets: Ultrasonically Welded Seams & Edges

Pocket Flutes: Ultrasonically Welded Support Spacers

Header: Electro-Galvanized Metal Header and "J" Style Media Retainers

Air Flow Bag 65% - 12 Pocket

Model Number	Width "A"	Height "B"	Depth "C"	Number of Pockets	Air Flow Capacity (cfm)	Initial Resistance ("w.g.)
AFB1265S-4415	23-3/8"	23-3/8"	15"	12	1500	.16
AFB1065S-0415	19-3/8"	23-3/8"	15"	10	1250	.16
AFB1065S-0015	19-3/8"	19-3/8"	15"	10	1000	.16
AFB665S-2415	11-3/8"	23-3/8"	15"	6	750	.16

Notes:

Standard: UL 900, Class 2

Available with the following
gasketing options:

GU - Gasket Upstream

GD - Gasket Downstream

GS - Gasket Sides

Other Options:

C - Cambridge Header

-1 - UL 900, Class 1

An example of the part number
with options is: AFB1265S-4415GU

DAYTON RELIABLE AIR FILTER

**2294 N. Moraine Dr.
Dayton, Ohio 45439
1-800-699-0747**



Air Flow Bag 65%, MERV 11,
12 Pocket

Date	Part Number	Revision
Approved	AFB1265S	