


10 Pocket

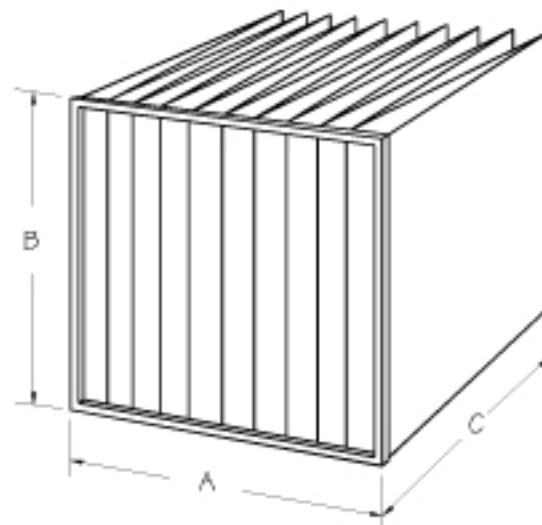

**Reliable Air Flow
Bag, 95%**

Characteristics

Media: 100% Synthetic Polypropylene Microfiber

Pockets: Ultrasonically Welded Seams & Edges

Pocket Flutes: Ultrasonically Welded Support Spacers

Header: Electro-Galvanized Metal Header and "J" Style Media Retainers

Air Flow Bag 95% - 10 Pocket

Model Number	Width "A"	Height "B"	Depth "C"	Number of Pockets	Air Flow Capacity (cfm)	Initial Resistance ("w.g.)
AFB1095S-4430	23-3/8"	23-3/8"	30"	10	2500	.44
AFB1095S-4426	23-3/8"	23-3/8"	26"	10	1875	.37
AFB1095S-4422	23-3/8"	23-3/8"	22"	10	1875	.39
AFB1095S-4415	23-3/8"	23-3/8"	15"	10	1250	.44
AFB895S-0430	19-3/8"	23-3/8"	30"	8	2000	.44
AFB895S-0426	19-3/8"	23-3/8"	26"	8	1500	.37
AFB895S-0422	19-3/8"	23-3/8"	22"	8	1500	.39
AFB895S-0415	19-3/8"	23-3/8"	15"	8	1000	.44
AFB595S-2430	11-3/8"	23-3/8"	30"	5	1250	.44
AFB595S-2426	11-3/8"	23-3/8"	26"	5	950	.37
AFB595S-2422	11-3/8"	23-3/8"	22"	5	950	.39
AFB595S-2415	11-3/8"	23-3/8"	15"	5	625	.44

Notes:

Standard: UL 900, Class 2

Available with the following
gasketing options:

- GU - Gasket Upstream
- GD - Gasket Downstream
- GS - Gasket Sides

Other Options:

- C - Cambridge Header
- 1 - UL 900, Class 1

An example of the part number
with options is: AFB1095S-4430GU

DAYTON RELIABLE AIR FILTER

**2294 N. Moraine Dr.
Dayton, Ohio 45439
1-800-699-0747**



Air Flow Bag 95%, MERV 14,
10 Pocket

Date	Part Number	Revision
Approved	AFB1095S	