


12 Pocket

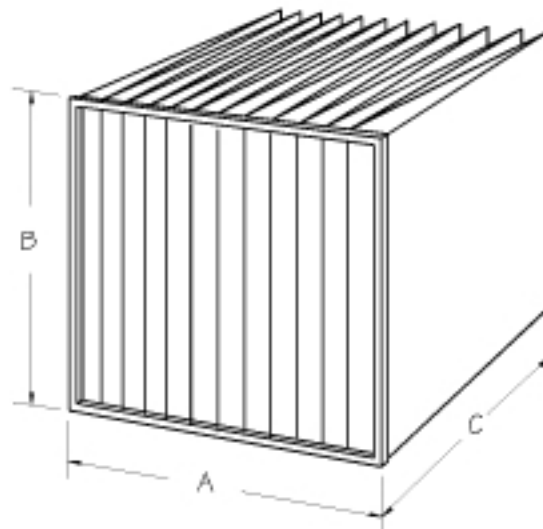

**Reliable Air Flow
Bag, 95%**

Characteristics

Media: 100% Synthetic Polypropylene Microfiber

Pockets: Ultrasonically Welded Seams & Edges

Pocket Flutes: Ultrasonically Welded Support Spacers

Header: Electro-Galvanized Metal Header and "J" Style Media Retainers

Air Flow Bag 95% - 12 Pocket

Model Number	Width "A"	Height "B"	Depth "C"	Number of Pockets	Air Flow Capacity (cfm)	Initial Resistance ("w.g.)
AFB1295S-4415	23-3/8"	23-3/8"	15"	12	1500	.35
AFB1095S-0415	19-3/8"	23-3/8"	15"	10	1250	.35
AFB1095S-0015	19-3/8"	19-3/8"	15"	10	1000	.35
AFB695S-2415	11-3/8"	23-3/8"	15"	6	750	.35

Notes:

Standard: UL 900, Class 2

Available with the following
gasketing options:

GU - Gasket Upstream

GD - Gasket Downstream

GS - Gasket Sides

Other Options:

C - Cambridge Header

-1 - UL 900, Class 1

An example of the part number
with options is: AFB1295S-4415GU

DAYTON RELIABLE AIR FILTER

**2294 N. Moraine Dr.
Dayton, Ohio 45439
1-800-699-0747**



Air Flow Bag 95%, MERV 14,
12 Pocket

Date

Part Number

Revision

Approved

AFB1295S